

DATA SHEET

3-349-867-03

9/11.24


ENERGYMID

MULTIFUNCTIONAL ENERGY METERS

EM2281 / EM2289 / EM2381 / EM2387 / EM2389



Ethernet

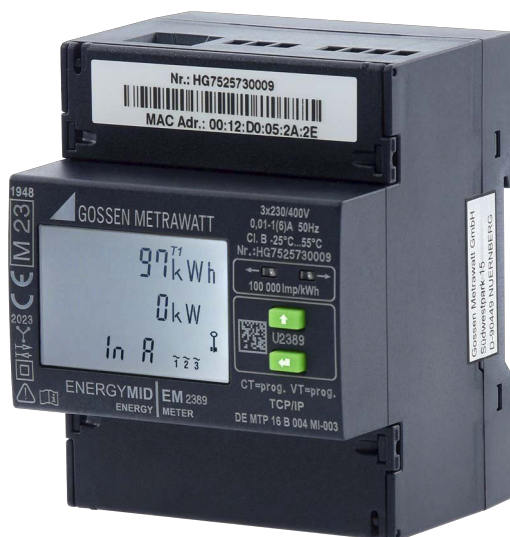

(when calibrated)



- Professional energy meter for 2, 3 and 4-wire systems with 5 (80) A direct connection or 1 (6) A transformer connection (also includes 5(6) A)
- Accuracy class B for industrial and commercial use, as well as for household use with highly demanding requirements
- MID approval (conformity assessment procedure, modules B and D)
- Configurable, multifunctional variants for acquiring reactive energy and grid state variables
- 4 quadrant measurement (import and export)
- Universal pulse output (double) with adjustable pulse rate and pulse duration, as well as selectable voltage range
- Communication via integrated interfaces: LON, M-Bus, Modbus RTU, TCP/IP (BACnet / Modbus TCP / HTTP), LPWAN (wireless interface supporting the LoRaWAN® protocol)
- 4 tariffs (hardware-controlled as standard feature), plus 4 additional tariffs (software controlled) with bus (features W1 / W2 / W4 / W7)
- Certified load profile in accordance with PTB-A 50.7 and PTB-A 50.7-1 (feature Z2)
- Indicates installation errors: phase sequence phase failure, reversed transformer polarity, overload
- Tamper-proof cover, configuration disabling
- Quality product made in Germany

(Product characteristics are model and feature-dependent. See this document.)

APPLICATIONS

The MID¹ certified energy meters included in the ENERGYMID product range are used to acquire and bill active energy in industrial, household, commercial and building management applications.

Integrated 4-quadrant measurement permits measurement of energy import and export. 4 tariffs (hardware-controlled as standard feature) and, depending on model or version, 4 additional tariffs (software-controlled) can be selected.

In combination with national approval of the integrated load profile (Z2) in accordance with PTB-A 50.7, this energy meter is also suitable for fulfilling legal energy requirements.

Energy data are transmitted to superordinate management systems via various communication interfaces, e.g. for acquisition and optimization, as well as for building automation and control technology.

Thanks to simple installation including detection of connection errors and flexible configuration options, it performs all measuring tasks highly proficiently.

1. Measuring Instruments Directive 2004/22/EG

Simply and conveniently specify the technical characteristics and other functions (e.g. pulse output, bus connection type and load profile) for your ENERGYMID energy meter via configurable features when placing your order – you get an individualized, device-specific variant which is perfectly matched to your needs.

MULTIFUNCTIONAL VERSION

Depending on the type of multifunctional variant, the meter is also capable of acquiring reactive power and indicating up to 33 additional measured quantities directly at the display.

Voltage level, utilization of individual phases, reactive power component and the functioning of compensation systems can thus be evaluated at any time by simply pressing a button without any additional measuring equipment. Refer to the table below for details.

Measuring Function		Accuracy (at ref. cond.)	Display (feature)			
Measured Quantity			M0	M1	M2 ¹	M3 ²
Active energy (kWh) ³	EP ₁ ... EP ₈ , EP _{tot}	±1%	•	•	•	•
Reactive energy (kVAh) ⁴	EQ _{tot}	±2%	—	—	•	•
Star voltage (V)	U _{1N} , U _{2N} , U _{3N}	0.5% ±1 d	—	•	—	•
Delta voltage (V)	U ₁₂ , U ₂₃ , U ₁₃	0.5% ±1 d	—	•	—	•
Current per phase (A)	I ₁ , I ₂ , I ₃	0.5% ±1 d	—	•	—	•
Neutral conductor current (A)	I _N ⁵	1% ±1 d, typical	—	•	—	•
Active power (kW)	P ₁ , P ₂ , P ₃ , P _{tot}	1% ±1 d	—	•	—	•
Reactive power (kVAh)	Q ₁ , Q ₂ , Q ₃ , Q _{tot}	1% ±1 d	—	•	—	•
Apparent power (kVA)	S ₁ , S ₂ , S ₃ , S _{tot}	1% ±1 d	—	•	—	•
Power factor (cosφ)	PF ₁ , PF ₂ , PF ₃ , PF _{tot}	1% ±1 d	—	•	—	•
Frequency (Hz)	f	0.05% ±1 d	—	•	—	•
RMS distortion value	THD U ₁ , U ₂ , U ₃		—	•	—	•
	THD I ₁ , I ₂ , I ₃		—	•	—	•

1. Not approved for billing purposes in Switzerland
2. The greatest current value per phase is used as a reference value for accuracy.
3. Total power (kW/kVAh) appears at auxiliary display 2 with plus or minus sign
4. Total power (kW/kVAh) appears at auxiliary display 2 with plus or minus sign
5. The greatest current value per phase is used as a reference value for accuracy.

APPLICABLE REGULATIONS AND STANDARDS

Directive 2014/32/EU of the European Parliament and of the Council of 26 February 2014 on the harmonisation of the laws of the Member States relating to the making available on the market of measuring instruments (recast) Text with EEA relevance	
DIN 43856	Electricity meters, tariff time switches and ripple control receivers; connection diagrams, terminal marking, circuit diagrams
DIN 43880	Built-in equipment for electrical installations; overall dimensions and related mounting dimensions
DIN 46200	Current carrying connection bolts up to 1600 A; design and assignment of current intensities
EN 50470-1	Electricity metering equipment (a.c.) – Part 1: General requirements, tests and test conditions – Metering equipment (class indexes A, B and C)
EN 50470-3	Electricity metering equipment (a.c.) – Part 3: Particular requirements – Static meters for AC active energy (class indexes A, B and C)
EN 55022	Information technology equipment – Radio disturbance characteristics – Limits and methods of measurement
EN 60529	Test instruments and test procedures – Degrees of protection provided by enclosures (IP code)
EN 61326-1	Electrical equipment for measurement, control and laboratory use – EMC requirements – Part 1: General requirements
EN 62052-1	Electricity metering equipment – General requirements, tests and test conditions – Part 11: Metering equipment
EN 62053-23	Electricity metering equipment (a.c.) – Particular requirements – Part 23: Static meters for reactive energy (classes 2 and 3)
EN 62053-31	Electricity metering equipment (a.c.) – Particular requirements – Pulse output devices for electromechanical and electronic meters (two wires only)
EN 62056-61	Electricity metering – Data exchange for meter reading, tariff and load control – Part 61: Object identification system (OBIS)
PTB-A 50.7	Requirements for electronic and software-controlled measuring instruments and ancillary equipment for electricity, gas, water and heat
PTB-A 50.7-1	Software requirements for measuring instruments and ancillary equipment according to PTB-A 50.7 equipment class 1: Simple instrument

TECHNICAL DATA

Some of the technical data are model and feature-dependent: Device type and (optional) order features are selected when ordering ⇒ "Order Information" 8.

All options are listed with corresponding identification in the following tables.

DEVICE CHARACTERISTICS

Connection	EM2281 / EM2289: direct EM2381 / EM2387 / EM2389: via transformer
Measurement type	4-quadrant measurement
Multifunctional version	Optional: U, I, P, Q, S, PF, f, THD, I_N (M1) / reactive energy (M2) / U, I, P, Q, S, PF, f, THD, I_N , THD, I_N , reactive energy (M3) ¹
Load profile	Optional: Load profile (Z1) / certified load profile per PTB-A 50.7 (Z2)
Approval	MID (conformity assessment procedure, modules B and D)
Accuracy class	B for industrial and commercial use, as well as for household use with highly demanding requirements

1. Not approved in Switzerland

MEASURING RANGES

Voltage		
Reference voltage U_n	U3:	100 ... 110 V L-L
AC	U5:	230 V L-N
	U6:	400 V L-L
Allowable deviation	-20% ... +15%	

Current	Direct Connection	Transformer Connection
I_{ref}	5 A	1 A
Starting current	20 mA	2 mA
I_{min}	0.1 A	0.01 A
I_{max}	80 A	6 A

Frequency range	
Nominal frequency	50 Hz
Cutoff frequency	45 Hz ... 65 Hz

Accuracy	
Active energy	Class B per EN 50470-3
Reactive energy	Class 2 per EN 62053-23

Sampling Rate	Continuous, 32 per period
----------------------	---------------------------

CURRENT AND VOLTAGE RANGES

Input voltage (reference voltage U_n AC)	EM2281:	230 V L-N (U5)
	EM2289:	400 V L-L (U6)
	EM2381:	230 V L-N (U5)
	EM2387:	100 ... 110 V L-L (U3) / 400 V L-L (U6)
	EM2389:	100 ... 110 V L-L (U3) / 400 V L-L (U6)
Nominal current (limiting current intensity)	EM2281 / EM2289: 5 (80) A EM2381 / EM2387 / EM2389: 1(6) A (including 5(6) A)	

Meter parameters and meter readings are retained in the event of power failure.

POWER CONSUMPTION AND POWER SUPPLY

Total	Single-phase: < 2 W (at nominal voltage) 3-phase: < 2 W (at nominal voltage) (where line frequency = 45 ... 65 Hz)
Internal power supply	From measuring voltage U_r : 80% ... 115% U_r 3.3 V / 100 mA With W4: 3.3 V / 200 mA (plus 100 mA for Ethernet)
Per voltage path (including power supply)	< 2 VA
Per current path	At I_{max} : < 1 VA for direct meter / < 0.2 VA for transformer meter At I_{ref} : < 0.02 VA for direct meter / < 0.005 VA for transformer meter
Starting current	Direct meter: approx. 17 mA at 0.1 ... 5(80) A Transformer meter: approx. 1.5 mA at 0.01 ... 1(6) A

AMBIENT CONDITIONS

Operating temperature	-25 ... +55 °C
Storage temperature	-25 ... +70 °C
Relative humidity	Max. 95%, no condensation allowed Max. 75% annual average and non-condensing
Elevation	Up to 2000 m
Place of use	Indoors

ELECTRICAL SAFETY

Pollution degree	2
Protection class	II
Insulating group	II
Utilization category (electrical switch-gear)	(only for meters with direct connection) UC-2 (per EN 60947)
Nominal insulation voltage	Inputs: 300 V _{AC} Output: 50 V _{DC} (bus/S0) with V0 / V1 / V2 / V7 / V8 / V9 230 V _{AC} (pulse) with V3 / V4
Insulation test voltage	Input ↔ output/housing: 4 kV _{AC} Output ↔ housing: 500 V (bus/S0) with V0 / V1 / V2 / V7 / V8 / V9 4 kV (pulse) with V3 / V4
Overload capacity	All meters: continuous 1.15 U _r and I _{max} Direct connection: 5 × 3 s, U _r and 100 A (5 min. interval) Direct connection: 1 × 1 s, U _r and 250 A, 10 ms 2400 A Current transformer connection: 0.5 s and 20 × I _{max}
Overvoltage category	III (per EN 62052-31) 230 (400) V _{AC} , 289 (500) V _{AC}
Rated impulse voltage	4 kV with basic insulation and 6 kV with reinforced insulation

ELECTROMAGNETIC COMPATIBILITY (EMC)

Interference emission	EN 55022 class B
Interference immunity	EN 61326-1
Electromagnetic classification	E2


WIRELESS TRANSMISSION CHARACTERISTICS (W8)

Interface	LPWAN supporting the LoRaWAN® protocol
Frequency range	868 MHz ISM
Channel bandwidth	125 kHz
Transmission intensity	14 dBm at max. permissible antenna gain of 2 dBi


MECHANICAL DESIGN

Mechanical classification	M1
Protection	Front (panel-mount instrument): IP 51 (protection against ingress of solid foreign objects: protected against harmful amounts of dust, protection against ingress of water: protection against dripping water) Terminals: IP 20 (protection against ingress of solid foreign objects: ≥ 12.5 mm diameter, protection against ingress of water: not protected) (per EN 60529 / IEC 60529)
Housing (W × H × D)	4 standard width units, approx. 72 × ≤ 90 × ≤ 70 mm
Housing material	Lexan polycarbonate per UL94 V0
Weight	< 0.3 kg
Mounting	Top-hat rail per EN 50022 (35 × 15 or 35 × 7.5 mm), snap-on C rail
Screw terminals	Slotted screws, 16 mm ² cross-section
Display	LCD, approx. 28 × 42 mm, 7-segment characters (0 to 99,999,999 digits) 1 main display: max. 8-place, height: 5.6 mm, 2 auxiliary displays: 8-place, height: 5 mm Refresh: approx. 6 times per second
Protection against tampering	Tamper-proof cover, configuration disabling

DISPLAY LAYOUT

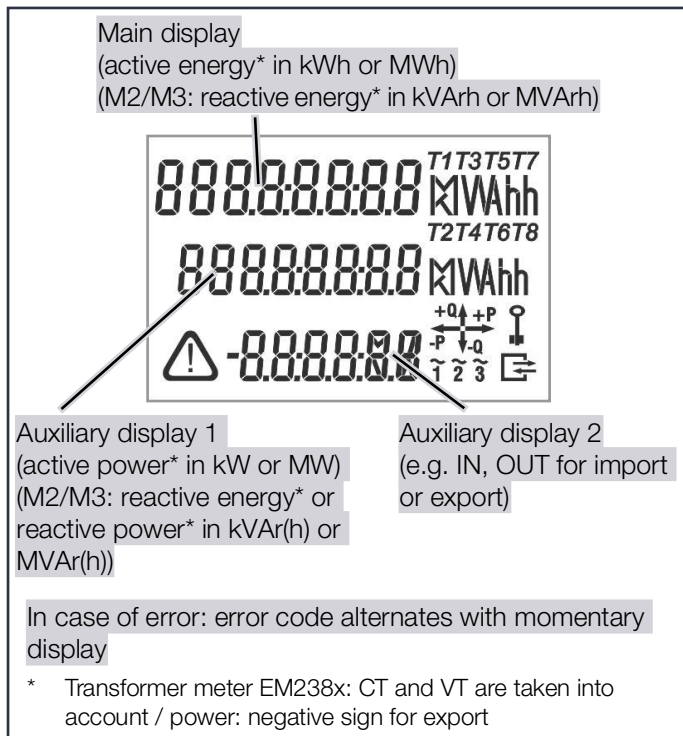

DIMENSIONAL DRAWING / INSTALLATION

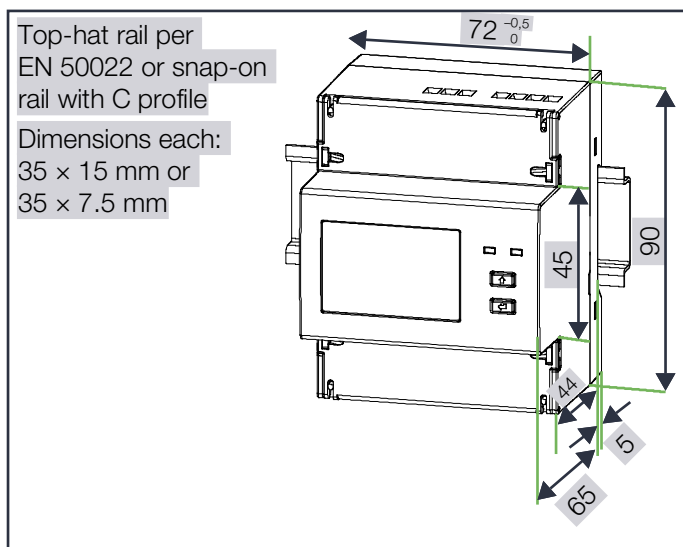

INTERFACES

The energy meters are equipped with two pulse outputs or one bus output as a standard feature.

PULSE OUTPUT

Model and feature-dependent, as well as optional:

- S0 standard, 1000 pls/kWh (V1) /
- S0 programmable, 1 ... 1000 pls/kWh sec. (V2 with EM2281 / EM2289) /
- S0 programmable, 1 ... 50,000 pls/kWh sec. (V2 with EM2381 / EM2387 / EM2389) /
- Switching output up to 230 V, 1000 pls/kWh (V3)/
- Switching output up to 230 V, programmable, 1 ... 1000 pls/kWh (V4 with EM2281 / EM2289) /
- Switching output up to 230 V, programmable, 1 ... 50,000 pls/kWh (V4 with EM2381 / EM2387 / EM2389) /
- S0 130 ms, 100 pls/kWh (V7 with EM2281 / EM2289) /
- S0 130 ms, 100 pls/kWh, in combination with Q9 depending on CT × VT (V7 with EM2381 / EM2387 / EM2389) /
- S0 130 ms, 1000 pls/kWh (V8)
- Customer-specific S0 (V9)

Pulse duration: 30 ms (adjustable up to 3 s with V2 / V4)

Interpulse period > 30 ms

U_{ext.}: max. 40 V (375 V with V3 / V4)

Switching current: max. 27 mA (100 mA with V3 / V4)

1 of 4 pulse sources can be selected for each output: active energy import, active energy export, reactive energy import or reactive energy export.

The pulse outputs are electrically isolated from the measuring circuit by means of an optocoupler.

BUS CONNECTION

Optional:

- LON (W1) /
- M-Bus (W2) /
- Modbus RTU (W7) /
- TCP/IP (BACnet / Modbus / TCP / HTTP) (W4)
- LPWAN wireless interface supporting the LoRaWAN® protocol (W8)

Refer to the interface description for detailed information, which is available at <https://www.gmc-instruments.de/services/download-center/>.

TARIFF INTERFACE

4 tariffs (hardware controlled) and 4 additional tariffs with bus feature W1 / W2 / W4 / W7¹


Power utility pulse

1. The 4 additional tariffs via bus are not included in the scope of MID approval.


CONNECTIONS

CIRCUIT DIAGRAMS – PULSE OUTPUT

Feature V1 / V2 / V7 / V8 / V9:

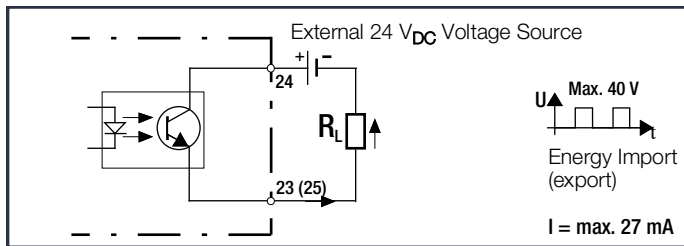

Feature V3 / V4:

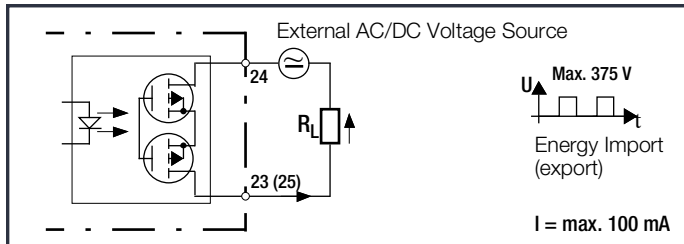

Type of energy can also be selected with features V2 / V4. The default setting is active energy import (23) / export (25).

MECHANICAL CHARACTERISTICS


All connection components are laid out as self-locking screw terminals, except for the TCP/IP interface which is equipped with an RJ-45 connector and the LPWAN interface which has an SMA antenna connector.

Connection	Direct	Transformer
Current input	Fine wire: 6 to 16 mm ² Solid wire: 6 to 25 mm ² With wire end ferrule: 6 to 16 mm ² Torque: 3 Nm	Fine wire: 0.5 to 4 mm ² Solid wire: 0.5 to 6 mm ² With wire end ferrule: 0.5 to 2.5 mm ² Torque: 0.5 Nm
Voltage input	–	Fine wire: 0.5 to 4 mm ² Solid wire: 0.5 to 6 mm ² With wire end ferrule: 0.5 to 2.5 mm ² Torque: 0.5 Nm
S0 pulse output, bus output, tariff input (power utility pulse)	Fine wire: Solid wire: With wire end ferrules: Torque: 0.4 Nm	0.2 to 2.5 mm ² 0.2 to 2.5 mm ² 0.25 to 1.5 mm ²
LON (W1)*	Twisted pair copper cable, recommended: JY (ST) Y 2 × 2 × 0.8 mm with twisted wire pairs (where 0.8 mm = wire diameter, wire cross-section = 0.5 mm ²), maximum cable length of 900 m with bus topology (bus terminator at both ends), 500 m with free topology (bus terminator at one end) or 320 m from device to device	
M-Bus (W2)*	2-wire twisted-pair	
TCP/IP (W4)*	RJ-45 (8P8C)	
Modbus (W7)*	2-wire twisted-pair, shielded if possible, maximum length of 1000 m (depending on cable thickness and transmission speed), cross-section of at least 0.22 mm ² , wave impedance: approx. 100 to 150 Ω, terminating resistors at both ends (the following applies: resistance value = line impedance)	
LPWAN (W8)*	Antenna connection (SMA plug) (SMA adapter, socket to socket, included in scope of delivery, torque: 57 Ncm)	


* Refer to the interface description for further details, which is available at <https://www.gmc-instruments.de/services/download-center/>.

WIRING DIAGRAMS – CURRENT AND VOLTAGE


EM2281 – Direct Connection
2-Wire System, Any Load

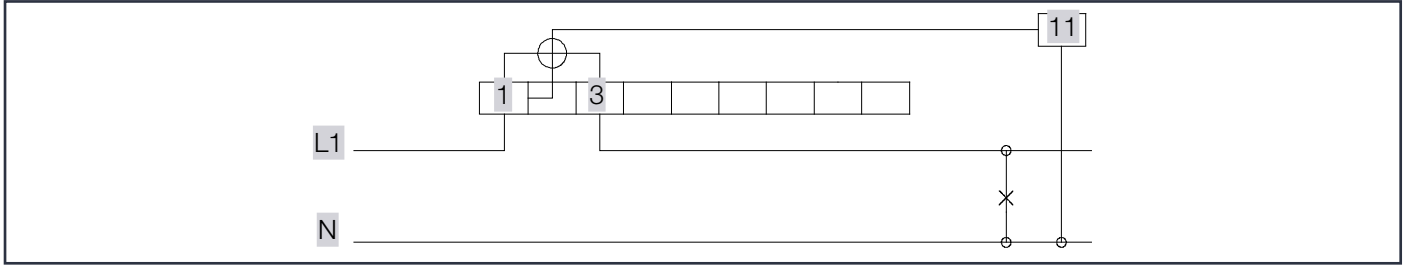


EM2289 – Direct Connection
4-Wire AC System, Any Load

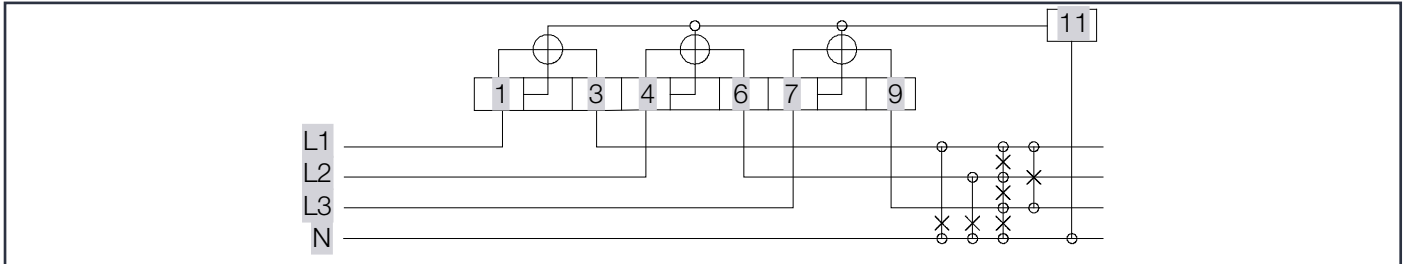


EM2381 – Transformer Connection
2-Wire AC System, Any Load

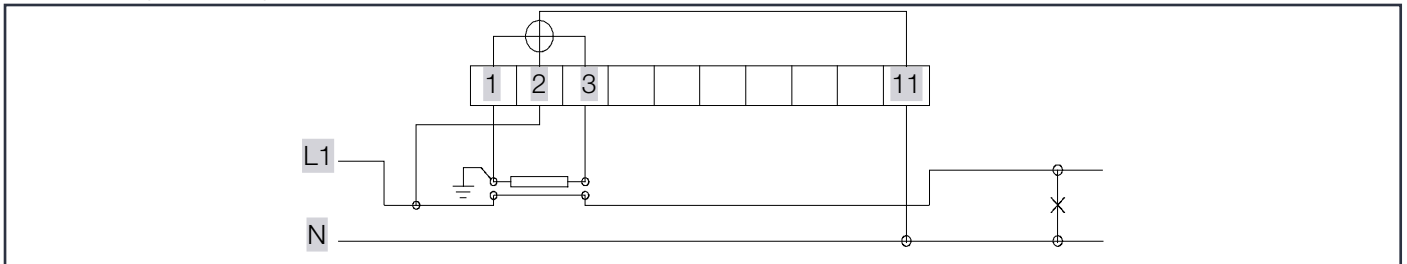

EM2387 – Transformer Connection
3-Wire AC System, Any Load

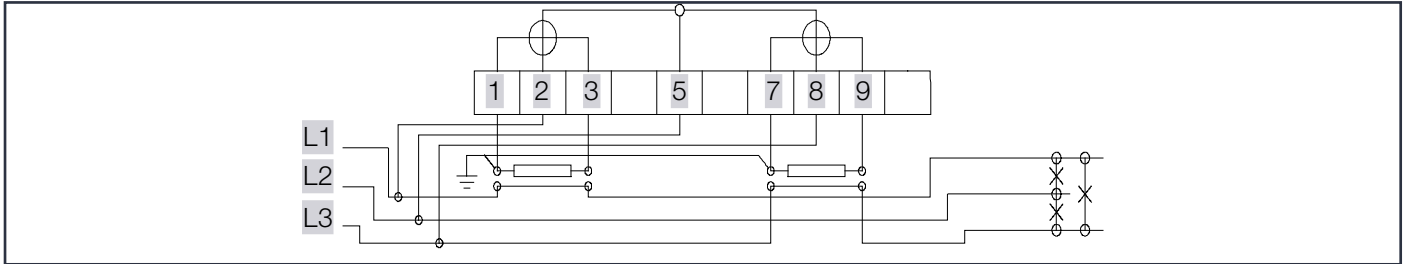

EM2389 – Transformer Connection
4-Wire AC System, Any Load

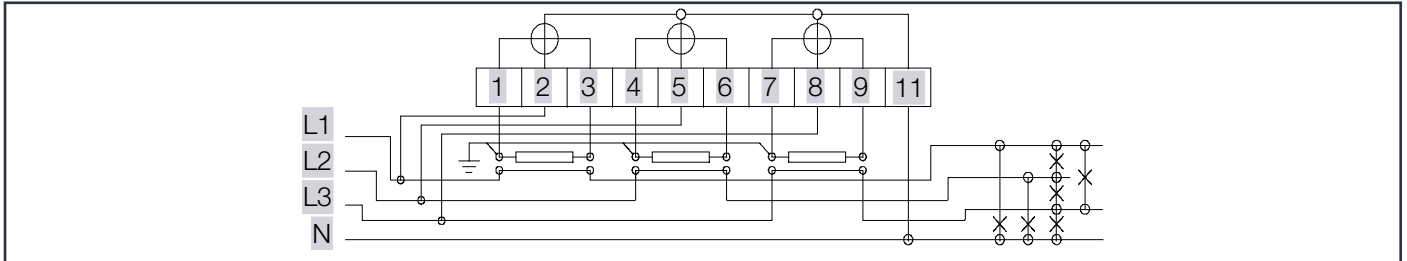

ORDER INFORMATION

Designation		Article Number / Feature				
EM2281 energy meter for 2-wire system, 230 V, direct connection, 5(80) A		U2281				
EM2289 energy meter for 4-wire system, any load, direct connection, 5(80) A			U2289			
EM2381 energy meter for 2-wire system, 230 V, transformer connection, 1(6) A (incl. 5(6) A)				U2381		
EM2387 energy meter for 3-wire system, any load, transformer connection, 1(6) A (incl. 5 (6) A)					U2387	
EM2389 energy meter for 4-wire system, any load, transformer connection, 1(6) A (incl. 5 (6) A)						U2389
Multifunctional version / display	None	M0	M0	M0	M0	M0
	With U, I, P, Q, S, PF, f, THD, I _N	M1	M1	M1	M1	M1
	With reactive energy ¹	M2	M2	M2	M2	M2
	With U, I, P, Q, S, PF, f, THD, I _N , reactive energy ¹	M3	M3	M3	M3	M3
Reference voltage U _n	100 ... 110 V L-L	—	—	—	U3	U3
	230 V L-N	U5	—	U5	—	—
	400 V L-L	—	U6	—	U6	U6
MID approval with declaration of conformity	MID approval	P0	P0	P0	P0	P0
Pulse output	None (only with bus connection)	V0	V0	V0	V0	V0
1000 pulses per kWh ²	S0 standard ³	V1	V1	V1	V1	V1
Programmable rate: 1 ... 1000 pulses per kWh sec.	S0, programmable ³	V2	V2	—	—	—
Programmable rate: 1 ... 50,000 pulses per kWh sec.	S0, programmable ³	—	—	V2	V2	V2
Switching output up to 230 V, 1000 pulses per kWh ²	230 V standard ³	V3	V3	V3	V3	V3
Switching output up to 230 V, progr. rate: 1 ... 1000	230 V, programmable ³	V4	V4	—	—	—
Switching output up to 230 V, progr. rate: ² 1 ... 50,000	230 V, programmable ³	—	—	V4	V4	V4
100 pulses per kWh	S0, 130 ms, 100 pulses per kWh ³	V7	V7	—	—	—
100 pulses per kWh, depends on CT x VT with Q9	S0, 130 ms, 100 pulses per kWh ³	—	—	V7	V7	V7
1000 pulses per kWh (not with Q9)	S0, 130 ms, 1000 pulses per kWh ³	—	—	V8	V8	V8
2000, 5000, 10,000 pulses per kWh VTA: entry for S0 100 ... 20,000 (with U6) VTB: entry for S0 100 ... 50,000 (with U5) VTC: entry for S0 100 ... 50,000 (with U3)	Customer-specific S0 ³ (not with Q9)	—	—	V9	V9	V9
				—	VTA = ____	VTA = ____
				VTB = ____	—	—
				—	VTC = ____	VTC = ____
Bus connection	None (only with pulse output)	W0	W0	W0	W0	W0
	LON ⁴	W1	W1	W1	W1	W1
	M-Bus ⁴	W2	W2	W2	W2	W2
	TCP/IP ⁴ (BACnet ⁴ / Modbus TCP / HTTP)	W4	W4	W4	W4	W4
	Modbus RTU ⁴	W7	W7	W7	W7	W7
Antenna connection (SMA)	LPWAN supporting the LoRaWAN [®] protocol	W8	W8	W8	W8	W8
Transformer ratios						
Fixed current/voltage	CT = VT = 1	—	—	Q0	Q0	Q0
Programmable current/voltage: secondary display approved for billing	Programmable CT and VT (CT × VT ≤ 100,000)	—	—	Q1	Q1	Q1
Fixed current/voltage, QCT = 1 ... 10,000, QVT = 1 ... 1000, CT × VT ≤ 1 million	Fixed CT, VT	—	—	Q9	Q9	Q9
				QCT = ____	QCT = ____	QCT = ____
				QVT = ____	QVT = ____	QVT = ____
Load profile	None	Z0	Z0	Z0	Z0	Z0
	With (not with W0 or W8)	Z1	Z1	Z1	Z1	Z1
	With certification per PTB-A 50.7 (only in combination with W4, not possible in combination with U3)	Z2	Z2	Z2	Z2	Z2

¹ Not approved in Switzerland

² For U238x with Q9: pulse rates are read out with ref. to primary side:

Pulse Rate Table CT × VT	V1 / V3	V7	V2 / V4
	Fixed	Fixed	Programmable
2 ... 10	1000 pls/kWh	100	1 ... 1000 pls/kWh
11 ... 100	100 pls/kWh	10	0.1 ... 100 pls/kWh
101 ... 1000	10 pls/kWh	1	0.01 ... 10 pls/kWh
1001 ... 10,000	1000 pl/MWh	100	1 ... 1000 pls/MWh
10,001 ... 100,000	100 pls/MWh	10	0.1 ... 100 pls/MWh
100,001 ... 1,000,000	10 pls/MWh	1	

³ Cannot be ordered in combination with W1 ... W8

⁴ Cannot be ordered in combination with V1 ... V9

Feature Q1 (only secondary display approved)

Only secondary values (menu selection) may be used for billing purposes.

Sample Order

4-wire system, any load, input voltage: 400 V,
with reactive energy measurement, with standard S0 pulse output,
with MID approval, without bus connection,
programmable transformation ratio, without load profile

Designation: U2389 M2 P0 Q1 U6 V1 W0 Z0

STANDARD METERS WITH MID APPROVAL (AVAILABLE FROM STOCK)

Direct Connection, 5(80) A, Class B, MID for 4-Wire System, 3 × 230 / 400 V with	Feature	Standard (M0)	Multifunctional Variant (M1)	Multifunctional Variant (M3)
Programmable S0 pulse rate	V2, P0, U6	U2289-V012	U2289-V022	—
LON	W1, P0, U6	U2289-V013	U2289-V023	—
M-Bus	W2, P0, U6	U2289-V014	U2289-V024	—
TCP/IP (BACnet / Modbus TCP / HTTP)	W4, P0, U6	U2289-V017	U2289-V027	—
TCP/IP with certified load profile	W4, P0, U6, Z2	—	U2289-V047	—
Modbus RTU	W7, P0, U6	U2289-V018	U2289-V028	—
LPWAN supporting the LoRaWAN [®] protocol	W8, P0, U6	—	—	U2289-V039

Transformer Connection, 5(6) A and 1(6) A, Class B, MID for 3-Wire System, 3 × 230 / 400 V, Programmable CT / VT, with	Feature	Standard (M0)	Multifunctional Variant (M1)
Programmable S0 pulse rate	V2, P0, U6, Q1	U2387-V012	U2387-V022

Transformer Connection, 5 (6) A and 1 (6) A, Class B, MID for 4-Wire System, 3 × 230 / 400 V, Programmable CT / VT, with	Feature	Standard (M0)	Multifunctional Variant (M1)	Multifunctional Variant (M3)
Programmable S0 pulse rate	V2, P0, U6, Q1	U2389-V011	U2389-V021	—
LON	W1, P0, U6, Q1	U2389-V016	U2389-V026	—
M-Bus	W2, P0, U6, Q1	U2389-V015	U2389-V025	—
TCP/IP (BACnet / Modbus TCP / HTTP)	W4, P0, U6, Q1	U2389-V017	U2389-V027	—
TCP/IP with certified load profile	W4, P0, U6, Z2	—	U2389-V047	—
Modbus RTU	W7, P0, U6, Q1	U2389-V018	U2389-V028	—
LPWAN supporting the LoRaWAN [®] protocol	W8, U6, V0, Q1	—	—	U2389-V039

SCOPE OF DELIVERY

- | | |
|------------------------------------|---|
| 1 Energy meter | 1 SMA adapter, socket to socket (only with feature W8, LPWAN) |
| 1 Condensed operating instructions | 1 Supplementaty sheet (only with feature W8, LPWAN) |

OPTIONAL ACCESSORIES

Type	Description	Article Number
Energy meter door mounting set	Energy meter door mounting set, 4 and 7 standard width units, for ENERGYMID and Compact Line energy meters	U270B
Antenna cable, SMA plug to SMA socket	LMR/CFD300 antenna cable, SMA plug to SMA socket, low loss, 10 meters long	Z309A
ISM stub antenna (868 MHz)	Highly efficient stub antenna optimized for LPWAN applications (868 MHz), SMA connector	Z309B
External magnetic antenna (868 MHz)	Magnetic antenna for 868 MHz frequency, SMA connector, cable length: 3 m	Z309C

ABBREVIATIONS AND THEIR MEANINGS

Abbreviation	Meaning
CT	Current transformation ratio
CT × VT	Product of CT times VT
EP ₁ ...EP ₈ , EP _{tot}	Active energy per tariff and total (all phases)
EQ ₁ ... EQ ₈ , EQ _{tot}	Reactive energy per tariff and total (all phases)
f	Frequency
I ₁ , I ₂ , I ₃	Current per phase (TRMS value)
I _N	Neutral conductor current (calculated)
I _{max}	Limit current
I _{min}	Minimum current value
I _{ref}	Reference current (value)
M0 (feature)	Without multifunctional variant
M1 (feature)	Multifunctional variant: measurement of U, I, P, Q, S, PF, f, THD, I _N
M2 (feature)	Measurement of reactive energy
M3 (feature)	Multifunctional variant: measurement of U, I, P, Q, S, PF, f, THD, I _N , reactive energy
P ₁ , P ₂ , P ₃ , P _{tot}	Active power, per phase and total
PF ₁ , PF ₂ , PF ₃ , PF _{tot}	Power factor (cosφ) per phase and total
P0 (feature)	MID approval
Q ₁ , Q ₂ , Q ₃ , Q _{tot}	Reactive power, per phase and total
Q0 (feature)	Fixed current/voltage, CT = VT = 1
Q1 (feature)	Programmable transformation ratios
Q9 (feature)	Fixed transformation ratios
S ₁ , S ₂ , S ₃ , S _{tot}	Apparent power, per phase and total
S0	Pulse rate, S0 output

Abbreviation	Meaning
THD I ₁ , I ₂ , I ₃	Current distortion component per phase (TRMS value), THD – total harmonic distortion
THD U ₁ , U ₂ , U ₃	Voltage distortion component per phase (TRMS value), THD – total harmonic distortion
U _n	Reference voltage
U _{1N} , U _{2N} , U _{3N}	Star voltage (TRMS)
U ₁₂ , U ₂₃ , U ₁₃	Delta voltage (TRMS)
U3 (feature)	Reference voltage: 100 ... 110 V L–L
U5 (feature)	Reference voltage: 230 V L–N
U6 (feature)	Reference voltage: 400 V L–L
V0 (feature)	Without pulse output
V1 (feature)	Pulse output
V2/V4 (feature)	Programmable S0
V9 (feature)	Customer-specific S0 rate
VT	Voltage transformation ratio
W0 (feature)	Pulse output only (without bus connection)
W1 (feature)	LON-Bus
W2 (feature)	M-Bus
W4 (feature)	TCP/IP (BACnet / Modbus TCP / HTTP)
W7 (feature)	MODBUS RTU
W8 (feature)	LPWAN supporting the LoRaWAN® protocol
Z0 (feature)	Without load profile
Z1 (feature)	Load profile (only possible with bus connection)
Z2 (feature)	Certified load profile per PTB-A 50.7 (only in combination with W4, not possible in combination with U3)






© Gossen Metrawatt GmbH
Prepared in Germany • Subject to change, errors excepted •
PDF version available on the Internet

All trademarks, registered trademarks, logos, product names and
company names are the property of their respective owners.
LoRaWAN® is a mark used under license from the LoRa Alliance®.

CONTACT US AT:

Gossen Metrawatt GmbH
Südwestpark 15
90449 Nürnberg
Germany

 +49 911 8602-0
 +49 911 8602-669
 info@gossenmetrawatt.com
 www.gossenmetrawatt.com