

SINEAX V604s

Programmable multifunctional transmitter

for direct currents, direct voltages, temperature sensors, teletransmitters or potentiometers



SINEAX V604s is a multifunctional transmitter for top-hat rail assembly with the following main characteristics:

- Measurement of DC voltage, DC current, temperature (RTD, TC) and resistance
- Sensor connection without any external jumpers
- 2 inputs (e.g. for sensor redundancy or difference formation)
- 2 outputs (U and / or I)
- DC- energy meter - function (with S0 output)
- 2 inputs can be linked with each other and allocated to the 2 outputs which enables calculations and sensor monitoring (e.g. prognostic maintenance of sensors).
- System capability: Communication via Modbus interface
- Freely programmable relay, e.g. for limit or alarm signalling
- Digital output (optional)
- AC/DC wide-range power supply unit
- Pluggable high-quality screw or spring cage terminals

All settings of the instrument can be adapted to the measuring task by PC software. The software also serves visualising, commissioning and service.



Table 1: Input variables, measuring ranges

Type of measurement	Measuring range	Minimum span
DC voltage [mV]	-1000 ... 1000 mV	2 mV
DC voltage [V]	-600 ... 600 V ¹⁾	≥1 V
DC current [mA]	-50 ... 50 mA	0.2 mA
Resistance [Ω]	0 ... 5000 Ω	8 Ω
RTD Pt100	-200 ... 850 °C	20 K
RTD Ni100	-60 ... 250 °C	15 K
TC Type B	0 ... 1820 °C	635 K
TC Type E	-270 ... 1000 °C	34 K
TC Type J	-210 ... 1200 °C	39 K

Type of measurement	Measuring range	Minimum span
TC Type K	-270 ... 1372 °C	50 K
TC Type L	-200 ... 900 °C	38 K
TC Type N	-270 ... 1300 °C	74 K
TC Type R	-50 ... 1768 °C	259 K
TC Type S	-50 ... 1768 °C	265 K
TC Type T	-270 ... 400 °C	50 K
TC Type U	-200 ... 600 °C	49 K
TC Typ W5Re-W26Re	0 ... 2315 °C	135 K
TC Type W3Re-W25Re	0 ... 2315 °C	161 K

1) In case of anterior device versions, the measuring range or the overload capacity is only -300...300V. Please check device version on the nameplate or with the PC software CB-Manager.

SINEAX V604s

Programmable multifunctional transmitter

Technical data

Measuring input 1

Direct voltage

Measuring range mV	For limits see table 1 Ri > 10 MΩ, continuous overload max. ±1200 mV
Measuring range V (only in corresponding device type)	For limits see table 1 Ri = 3 MΩ, continuous overload max. ±600 V ¹⁾

Direct current

Measuring range mA	For limits see table 1 Ri = 11 Ω, continuous overload max. ±50 mA
--------------------	---

Resistance thermometer RTD

Resistance measurement types	Pt100 (IEC 60751), adjustable Pt20...Pt1000 Ni100 (DIN 43760), adjustable Ni50...Ni1000
Measuring range limits	See table 1
Wiring	2, 3 or 4-wire connection
Measuring current	0.2 mA
Line resistance	30 Ω per line, in 2-wire connection adjustable or calibratable

Thermocouples TC

Thermocouples	Type B, E, J, K, N, R, S, T (IEC 60584-1) Type L, U (DIN 43760) Type W5Re-W26Re, W3Re- W25Re (ASTM E988-90)
Measuring range limits	See Table 1
Cold junction compensation	Internal (with installed Pt100), with Pt100 on terminals or external with reference junction -20...70 °C

Resistance measurement, teletransmitter, potentiometer

Measuring range limits	See table 1
Wiring	2, 3 or 4-wire connection
Resistance teletransmitter	Type WF and WF DIN
Measuring current	0.2 mA
Line resistance	30 Ω per line, in 2-wire connection adjustable or calibratable

Measuring input 2

Direct current

Measuring range mA (only in corresponding device type)	Same as measuring input 1
---	---------------------------

Direct voltage

Measuring range mV	Same as measuring input 1
--------------------	---------------------------

Resistance thermometer RTD

Same as measuring input 1 except:
Wiring 2 or 3 wire connection

Thermocouples TC

Same as measuring input 1

Resistance measurement, teletransmitter, potentiometer

Same as measuring input 1 except:
Wiring 2 or 3 wire connection

Please note

The following device types are available:

a) V604s with measuring input for 1x direct current [mA] and 1x high direct voltage [V]
The direct voltage [V] and direct current [mA] measuring methods can be allocated to Input 1 or Input 2 here.

b) V604s with measuring input for 2x direct current [mA]

The different device types are firm and cannot be reprogrammed!

The measuring inputs 1 and 2 are galvanically connected. If 2 input sensors or input variables are used, observe combination options in Table 3 and circuit instructions contained in the operating instructions!

Analog outputs 1 and 2

The two outputs are galvanically connected and have a common earth. Voltage and current output software-configurable.

Direct current

Output range	± 20 mA, range may be freely set
Burden voltage	max. 12 V
Open circuit voltage	< 20 V
Limit	Adjustable, max. ±22 mA
Residual ripple	<1% pp related to 20 mA

Direct voltage

Output range	± 10 V, range may be freely set
Load	max. 20 mA
Current limit	Approx. 30 mA
Limit	Adjustable, max. ±11 V
Residual ripple	<1% pp related to 10 V

Output settings

Limit
Gain/offset trimming
Inversion

Relay contact output

Variant Relay:

Contact	1 pole, normally open contact (NO)
Switching capacity	AC: 2 A / 250 V DC: 2 A / 30 V

Variant digital output:

Contact	Transistor, normally open contact (NO)
Switching capacity	max. 27VDC/27mA

Programmable multifunctional transmitter

Bus/programming connection

Interface, protocol RS-485, Modbus RTU
Baudrate 9.6...115.2 kBaud, adjustable

Transmission behaviour

Measured quantities for the outputs

- Input 1
- Input 2
- Input 1 + input 2
- Input 1 – input 2
- Input 2 – input 1
- Input 1 · input 2
- Minimum value, maximum value or mean value of input 1 and input 2
- Sensor redundancy Input 1 or input 2

Transmission functions Linear, Absolute amount, scaling (gain/ offset), magnifier function (zoom)
user-specific via basic value table (24 basic values per measured variable)

Settling time: Adjustable 1...30 s

Limit values and monitoring

Number of limitvalues 2

Measured variable for the limit values

- Input 1
- Input 2
- Measured variable for outputs
- Input 1 – input 2 (e.g. drift monitoring in case of 2 sensors)
- Input 2 – input 1 (e.g. drift monitoring in case of 2 sensors)
- Meter 1

Functions Absolute amount
Gradient dx/dt (e.g. temperature gradient monitoring)

Time delay Adjustable 0...3600 s

Signalling Relay contact or digital output, alarm LED, status 1

Meter and pulse output

Meter 1:

Number 1

Meter source Measured variables for outputs 1 or 2

Settings Mode (pos., neg.), unit (prefix, s/min/h), meter reset / set

Pulse output 1 (variant digital output)

Standard: S0 interface according to IEC/EN 62053-31

Settings Pulse duration (30...250ms), pulse rate

Signalling Digital output

Sensor breakage and short circuit monitoring measuring input

Signalling Relay contact or digital output, alarm LED, status 1
Output value in case of a fault

Signalling to alarm LED

In case of a sensor error, the defective input (1 or 2) is signalled by the number of flashes of the alarm LED (1x or 2x).
In case of a failure at both inputs: Alarm LED does not flash.

Other monitoring operations

Drift monitoring

Monitoring of measured value difference between 2 input sensors for a certain period of time (e.g. due to different sensor response times).
If the limit value is exceeded for this time, an alarm is signalled. (See limit values 1 and 2)

Sensor redundancy

Measurement with 2 temperature sensors; if sensor 1 fails (fault) sensor 2 is activated for bridging (see measuring quantities for outputs)

Alarm signalling

Relay contact or digital output

With closed contact, the yellow LED shines, invertible alarmfunction

Alarm LED

Time delay

Adjustable 0...60 s

Output value in case of a fault


For sensor breakage and short circuit, value adjustable –10...110%

Power supply

Rated voltage UN	Tolerance
24...230 V DC	±15%
100...230 V AC, 50...400 Hz	±15%

Power consumption >3 W or 7 VA

Displays at the instrument

LED	Color	Function
ON	green	Power on
	green flashing	Communication activ
ERR	red	Alarm
	yellow	Relais on

Configuration, programming

Operation with PC software «CB-Manager»

SINEAX V604s

Programmable multifunctional transmitter

Accuracies (according to EN/IEC 60770-1)

Reference conditions

Ambient temperature	23 °C ± 2 K
Power supply	24 V DC
Reference value	Span
Settings	Input 1: Direct voltage mV, 0...1000 mV Output 1: 4...20 mA, burden resistance 300 Ω Mains frequency 50 Hz, Setting time 1 s Input 2, output 2, relay, monitor- ing off or not active, for voltage output: range 0...10 V, burden resistance 2 kΩ
Installation position	Vertically, detached

Basic accuracy

At reference conditions	±0.1%
<i>Other types of measurement and input ranges:</i>	
RTD Pt100, Ni100	±0.1% ±0.2 K
Resistance measurement	±0.1% ±0.1 Ω
TC Type K, E, J, T, N, L, U	±0.1% ±0.4 K, measurement value > -100 °C
TC Type R, S	±0.1% ±2.4 K
TC Type B	±0.1% ±2.4 K, measurement value > 300°C
TC W5Re-W26Re, W3Re-W25Re	±0.1% ±2.0 K
DC voltage mV	±0.1% ±0.015 mV
DC voltage V	U ≤ 300V ±0.1% ±0.0045 V U > 300V +/-0.15%+0.0045V
DC current mA	±0.1% ±0.0015 mA

Additional error (additive)

High range minimum value (Minimum value >40% of maximum value):	±0.1% of maximum value
Small output range	±0.1% * (reference range / new range)
Cold junction compensation internal	±3 K
Magnifier function	± Zoom factor x (basic accuracy + additional error) Zoom factor = measured variable range / zoom range

Influencing factors

Ambient temperature	±0.1% per 10 K at reference con- ditions other settings: basic accuracy and additional errors per 10 K
Long-term drift	±0.1%
Common mode/ series mode influence	±0.2%

Ambient conditions

Operating temperature	-25 ... +55 °C
Storage temperature	-40 ... +70 °C
Relative humidity	≤75%, no condensation
Range of utilisation	Internal room up to 2000m above sea level

Installation details

Design	Top-hat rail housing U4 Combustibility class V-0 according to UL 94
Dimensions	See dimensional drawing
Assembly	For snap-on fastening on top-hat rail (35 x 15 mm or 35 x 7.5 mm) according to EN 50 022
Terminals	Pluggable, 2.5 mm ² Front plug spring terminal 1.5 mm ²
Weight	0.14 kg

Product safety, regulations

Electromagnetic compatibility	EN 61 000-6-2 / 61 000-6-4
Ingress protection (acc. IEC 529 or EN 60 529)	Housing IP 40 terminal IP20
Electric design	Acc. IEC or EN 61 010
Degree of pollution	2
Between power supply and all circuits	Reinforced insulation overvoltage category III operating voltage 300 V test voltage 3.7 kV AC rms
Between the measuring input (1+2) and all circuits	Reinforced insulation overvoltage category III operating voltage 300 V overvoltage category II operating voltage 600 V test voltage 3.7 kV AC rms
Between output (1 + 2) and relay contact resp. digital output	Reinforced insulation overvoltage category II Working voltage 285 V Test voltage 2.3 kV AC rms
Between output (1 + 2) and the bus connection	Functional insulation Working voltage <50 V Test voltage 0.5 kV AC rms
Environmental tests	EN 60068-2-1/-2/-3 EN 60068-2-27 Shock: 50g, 11ms, sawtooth, half-sine EN 60068-2-6 Vibration: 0.15mm/2g, 10...150Hz, 10 cycles

Programmable multifunctional transmitter

Electric connections

Circuit	Terminal	Remarks
Measuring input	1 to 8	See table 2
Output 1 Output 2	11 (+), 12 (-) 10 (+), 12 (-)	
Relay contacts	9 (+), 13 (-)	+, -: polarity at digital output
Power supply	15 (+/-) 16 (-/-)	Note polarity at DC
Bus/ programming connection	+, -, GND	Front plug

Variant digital output:




Table 2: Connection of inputs

Please note: If 2 input sensors or input variables are used, observe combination options in Table 3 and circuit instructions contained in the operating instructions!

Type of measurement	Wiring	
	Input 1	Input 2
Direct voltage mV		
Thermocouple with external cold junction thermostat or internally compensated		
Thermocouple with Pt100 at the terminals at the same input		

Type of measurement	Wiring	
	Input 1	Input 2
Thermocouple with Pt100 at the terminals at the other input		
Resistance thermometer or resistance measurement 2-wire		
Resistance thermometer or resistance measurement 3-wire		
Resistance thermometer or resistance measurement 4-wire		
Resistance-teletransmitter WF		
Resistance-teletransmitter WF-DIN		
Direct voltage V (only in corresponding device type)		

SINEAX V604s

Programmable multifunctional transmitter

Type of measurement	Wiring	
	Input 1	Input 2
Direct current mA (Input 2 only in corresponding device type)		

Table 3: Measuring method combination options


Input 1 measuring method	Input 2 measuring method	U [mV] earthed		U [V] 1		I [mA] 1		TC ext. earthed		TC int. earthed		R 2L	R 3L	RTD 2L	RTD 3L	I [mA] 2
		7,8	6,4	5,4	7,8	7,8	2,7,8	2,8	2,7,8	2,8	2,7,8	6,4				
Terminals	7,8	6,4	5,4	7,8	7,8	2,7,8	2,8	2,7,8	2,8	2,7,8	6,4					
U [mV] earthed	3,4	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
U [V] 1	6,4	✓		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
I [mA] 1	5,4	✓	✓		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
TC ext. earthed	3,4	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
TC int. earthed	3,4	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	1,3,4	✓			✓			✓				✓	✓	✓	✓	✓
R 2L	1,4	✓			✓			✓				✓	✓	✓	✓	✓
R 3L	1,3,4	✓			✓			✓				✓	✓	✓	✓	✓
R 4L	1,2,3,4	✓			✓			✓								
RTD 2L	1,4	✓			✓			✓				✓	✓	✓	✓	✓
RTD 3L	1,3,4	✓			✓			✓				✓	✓	✓	✓	✓
WF	1,3,4	✓			✓			✓				✓	✓	✓	✓	✓
WF_DIN	1,3,4	✓			✓			✓				✓	✓	✓	✓	✓
RTD 4L	1,2,3,4	✓			✓			✓								

1 Selectable only in device type 1x direct current [mA] and 1x high voltage [V]


2 Selectable only in device type 2x direct current [mA]

Dimensional drawing

Screw terminals

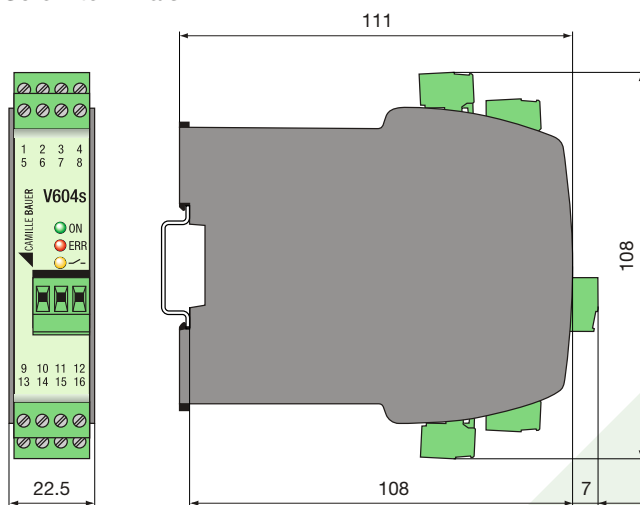

Spring cage terminals

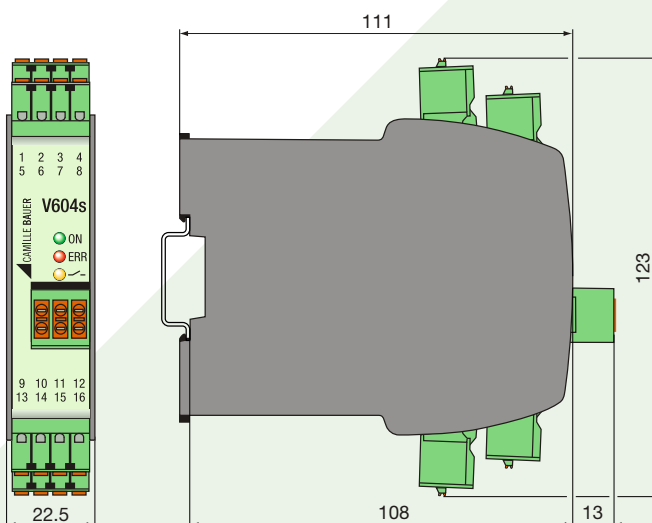

Scope of supply

- 1 SINEAX V604s
- 1 Safety Instructions 168501
- 1 Software and Docu-CD 156027

Accessories

USB-RS485 converter
(for programming the V604s)

Article No. 163 189

SINEAX V604s

Programmable multifunctional transmitter

Order Code

SINEAX V604s, programmable universal signal converter

Design	Version	Bus connection	Standard protocol	Climatic rating	Test certificate	Configuration	Power frequency suppression	Input 1	Sensor type input 1	Input 2	Sensor type input 2	Measuring output 1	Measuring output 2	Relais output	Article Number
• Rail mounting housing	• 1 Standard with screw terminals	• RS485 (RTU)	• Modbus	• Standard climatic rating	• Test certificate English	• Standard configuration, freely configurable	• 50Hz / 60Hz	• Input [mV] to 1000 mV	• Without	• Without	• Without	• Current [mA]	• Not used	• Relay, closer; 2A/250VAC; 2A/30VDC	• 193321
•	•	•	•	•	•	•	•	• Input [V] to 600 VDC	• Without	• Input [mA]	• Without	•	• Current [mA]	•	• 193329

- Variant active / - variant inactive



CAMILLE BAUER

Camille Bauer Metrawatt AG
 Aargauerstrasse 7
 CH-5610 Wohlen / Switzerland
 Phone: +41 56 618 21 11
 info@camillebauer.com
 www.camillebauer.com